


Standard	UL	VDE
Rated voltage	150V	250V
Rated current	4A	5A
Withstanding voltage	AC1200V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	2.50mm(.150")	
Poles	2P, 3P --- Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

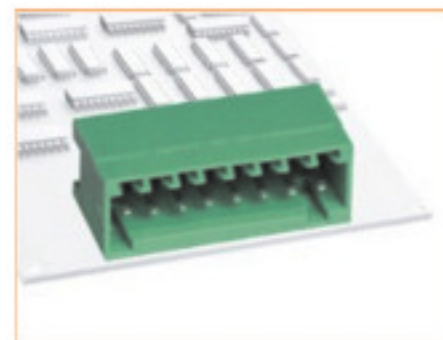

RoHS Compliant		<b>SCHMID-M</b>	
APPD.	SYMBOL	TOLERANCE	PART NAME
DWG.	HELGA	XX ± 0.25 XX ± 0.25 ANG.	Pluggable Terminal Block PCB Right Angle Pitch 2,50mm Green XX: No. Poles
DATE	2013/10	UNIT	PART NO.
		M M	SM C09 0252 XX ROC
		PAGE	
		1 OF 1	
		SIZE	
		A 4	
		REV	
		C	