
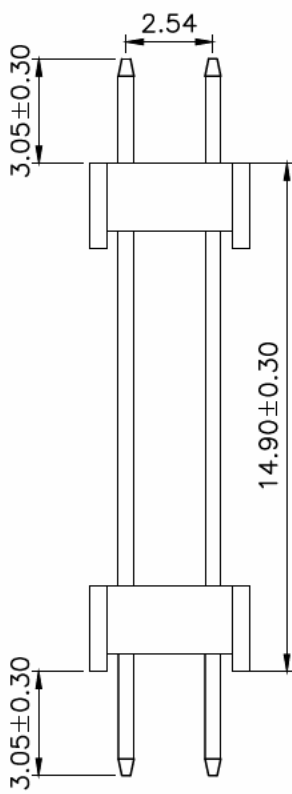
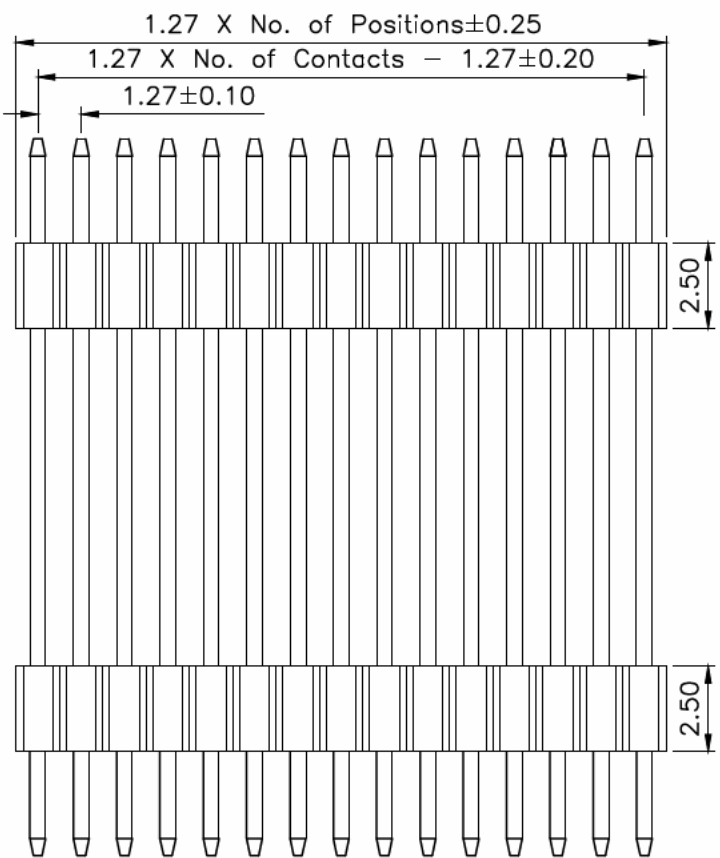



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2017.03.14	

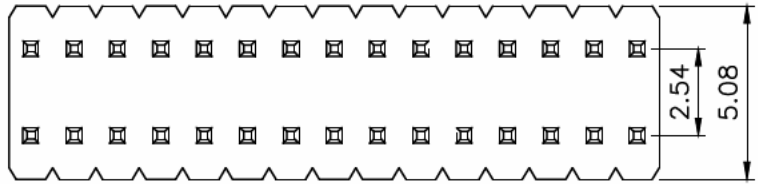

Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be ROHS materials

RECOMMENDED P.C.B LAYOUT

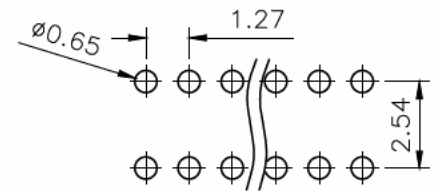

A

SCHMID-M

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE: 2017.03.014
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

PART NO. SM C02 1270 40 FS
 A-3,0mm C-21,0mm
 D-14,9mm E-3,0mm

TITLE.
 PIN HEADER DUAL ROW
 DUAL INS THT 1,27x2,54
 STRAIGHT
 XX: Nr. PINS TOTAL

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1