

REV.	LOGS.	DESCRIPTION	DATE	DRAWN
		INITIAL RELEASE:	2017-08-01	

Specifications




Current Rating: 3Amp
 Insulation Resistance: 1000M Min. Ω
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m Max Ω
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

All materials must be GP materials

Recommended P.C.Board
 Hole Layout

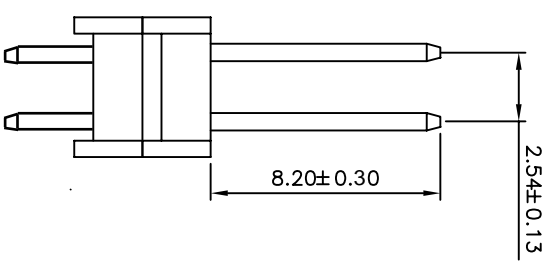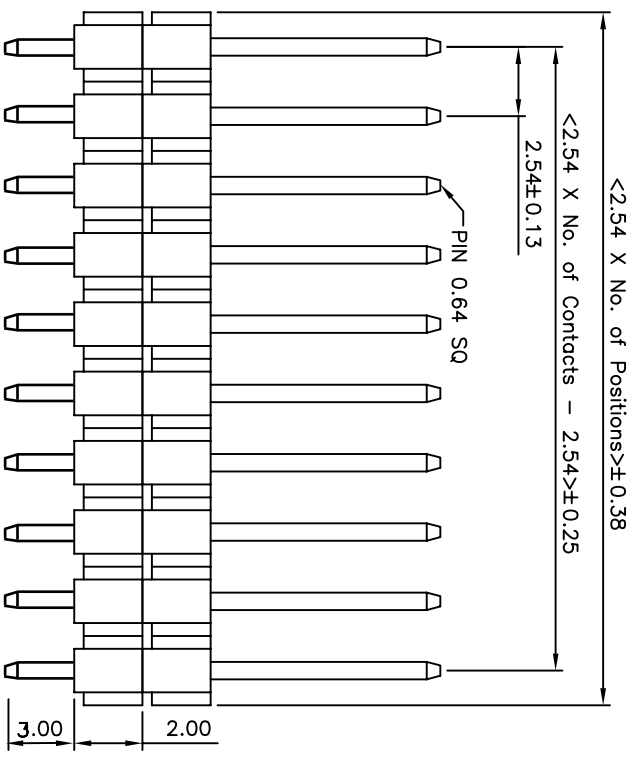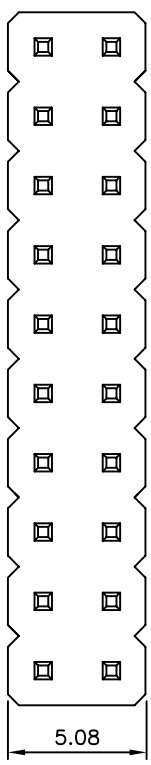

GENERAL TOLERANCE

X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

DESIGN:

CHECKED:	DATE:	2017-08-01
AUDITED:	DATE:	
APPROVED:	DATE:	


DWG. NO.

PART NO.	SM C02 2243 XX BS - 4mm
----------	-------------------------

TITLE:

2.54mm Pin Header, Straight Type,
 Plastic Housing height is 4.00mm

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1



1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A

B

C

D

E

F