
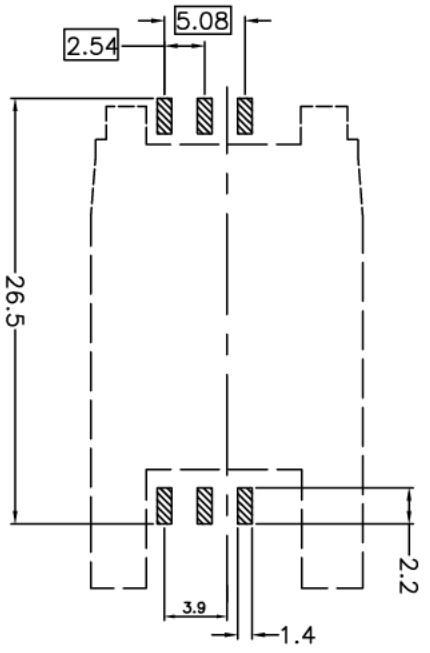
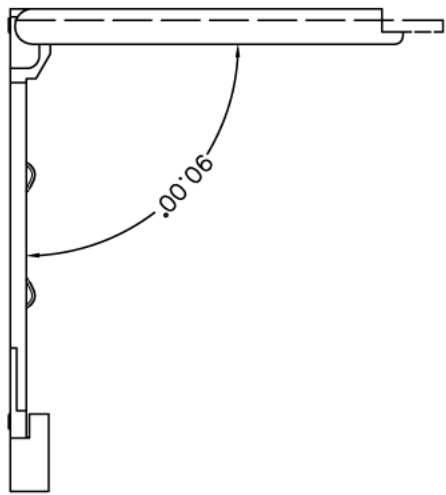


REV.	ZONE	DESCRIPTION	DESIGN	DATE
B				

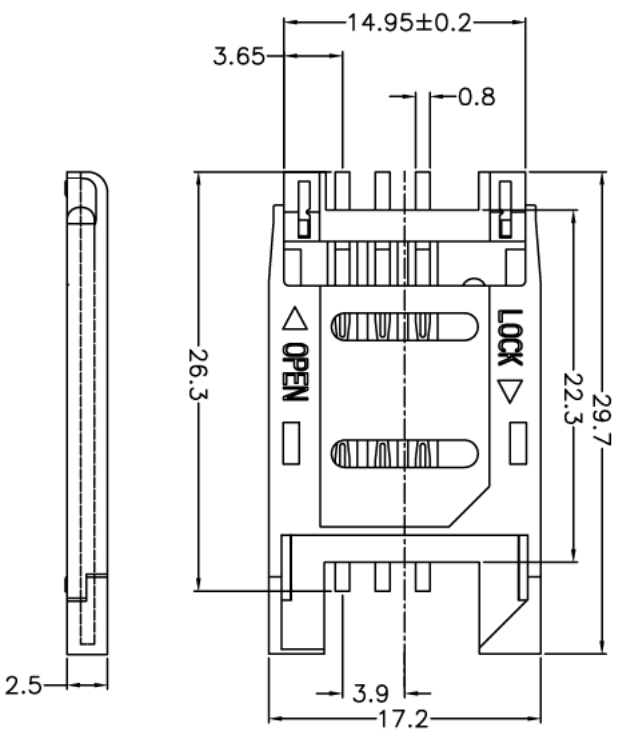


RECOMMENDED PCB LAYOUT
NORMAL TOL:±0.05

NOTE:

1. MATERIAL:SEE TABLE
2. FINISH:SEE TABLE
2. RATING:
OPERATING VOLTAGE: 12V
CURRENT RATING: 1.0A
OPERATING TEMPERATURE: -20°C~+70°C
3. ELECTRICAL:
INSULATOR RESISTANCE: 100M Ω MIN.
WITHSTANDING VOLTAGE: 500 VAC / MINUTE
CONTACT RESISTANCE:60mΩ MIN.
4. ROHS 2002/95/EC COMPLIANT.

3	TERMINAL	6	COPPER ALLOY	AU PLATING	CONTACT AREA:G.F.TIN PLATED ON SOLDER-TAIL
2	SHIELD	1	THERMOPLASTIC		UL 94V-0;COLOR:BLACK
1	HOUSING	1	THERMOPLASTIC		UL 94V-0;COLOR:BLACK
ITEM	NAME	Q'TY	MATERIAL	FINISHED	NOTE



Unless otherwise specified tolerances are

X.	±0.30	DRAW NO.	DATE	DRAW NAME:
X.X	±0.25	DWN	Mark	SIM CARD 6P HINGED TYP
X.XX	±0.20	CHK	Thomas	2.5H(PLASTIC)
X.XXX	±0.15	APVD		P/N : SM C06 0612 06B
X.X'	±2.0°			
X.X''	±1.0°			

Third Angle Project	FINISH	MATERIAL	UNIT	SCALE	REV	SHEET
	SEE NOTES		mm	1:1	B	1 OF 1