
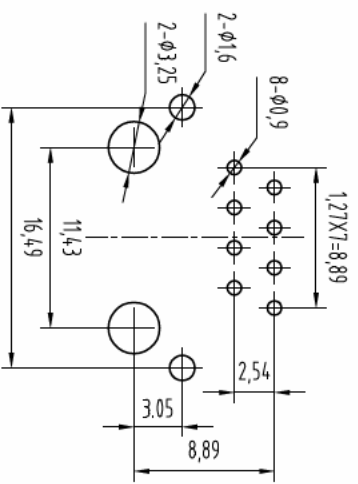
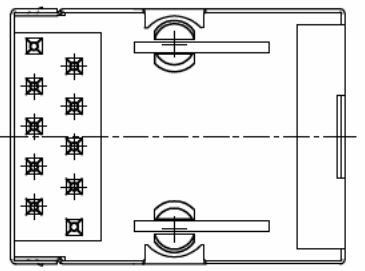
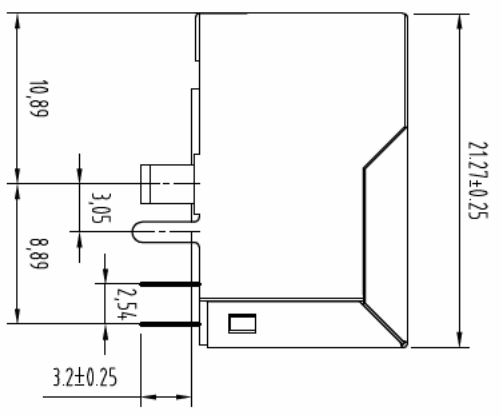


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

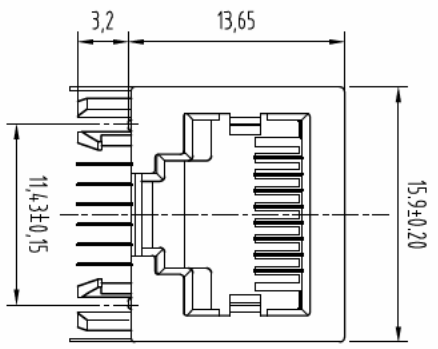

PC Board Layout  
Component Side Shown

NOTES:

MATERIAL :

- 1 HOUSING MATERIAL
  - 2 CONTACT MATERIAL
  - 3 PLATING
  - 4 SHIELD
- ELECTRICAL:
- 1 VOLTAGE RATING : 25 VAC RMS.
  - 2 CURRENT RATING : 15 AMP.
  - 3 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
  - 4 INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC.
  - 5 DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50HZ MIN.
- MECHANICAL:
- 1 DURRABILITY : 750 CYCLES MIN.
  - 2 P/PB RETENTION PRE-SOLDER : 1 LB MIN.
- ENVIRONMENTAL:
- 1 STORAGE : -40°~+85°
  - 2 OPERATION : 0° TO 70°C

DIMENSIONS		UNITS	
MM	INCH	MM	INCH
TOLERANCES EXCEPT AS NOTED			
M	M	FRACTIONS	DECIMALS
±0.15	±0.004	1/16	0.001
±0.05	±0.002	1/32	0.0005
±0.02	±0.0008	1/64	0.0001
ANGLES & 45			
THIRD ANGLE PROJECTION			



DRWING NO.	SM C04 0060 88 AA
PART NO.	
DO NOT SCALE DRAWING	
SIZE	A3
REV	0
SHEET	X
OF	Y