

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

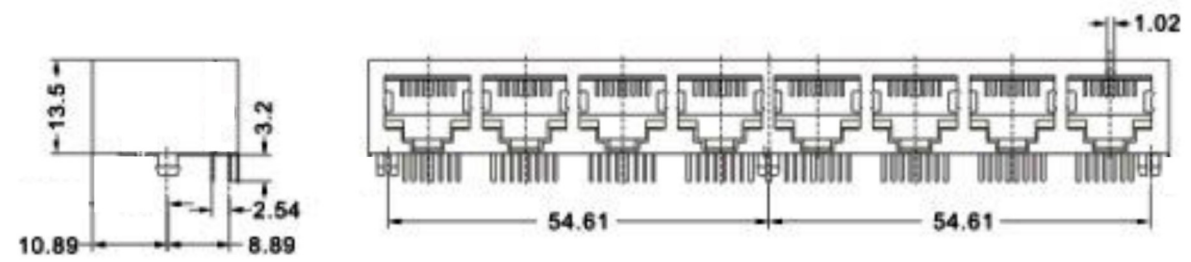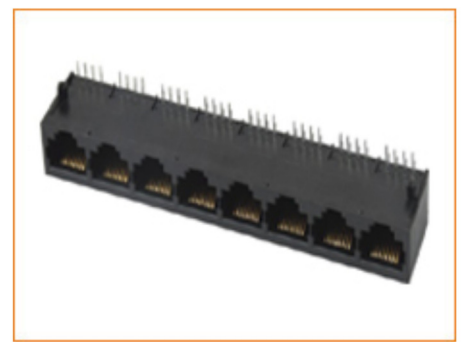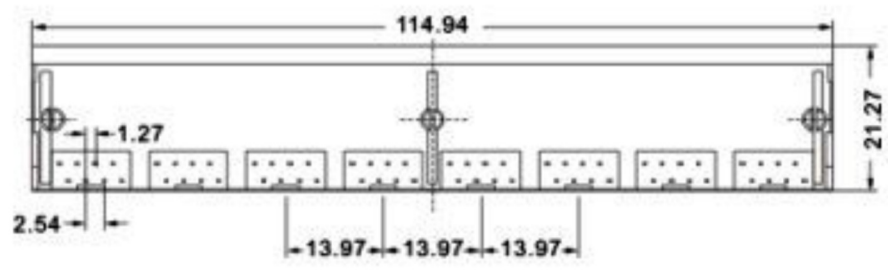

Contact Resistance	2 mΩ max.
Insulator Resistance	500 mΩ ,min. at DC 500V
Current Rating	24V DC 3 AMP Max
Withstanding voltage	AC500V/1Min
Contact	Phosphor Bronze , Gold Plated Or Tin Plated
Housing	PBT & 30% Glass Fiber(UL94V-0)
Position Details	8P8C

**RoHS
Compliant**

SCHMID-M

APPD.		TOLERANCE	0 ± 0.38 .00 ± 0.25 ANG. ± 3°
DWG. HELEN		SCALE	
DATE	UNIT	SIZE.	A 4 A
2011/5/31	M M	REV.	
	PAGE	1 OF 1	

PART NAME	SIDE ENTRY PCB JACK ROUND PIN 8P8C 8 JACKS B TYPE W/O SHIELD BLACK ROHS
PART NO.	SM C04 0060 88 HN

1 2 3 4 5 6 7 8