

Features:

- Available in 2 thru 12 circuits
- Material: htn. UL 94V-0
- Standard color: Black
- Accepts T4130 series terminals



Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000mΩ min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

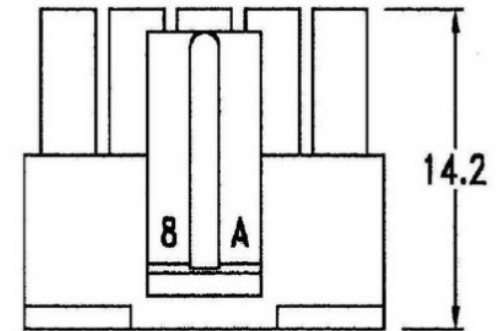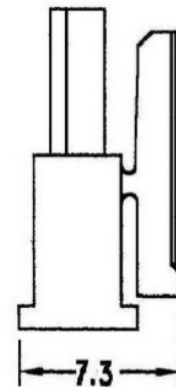

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	7.0	4	9.0	13.0	6	15.0	19.0
3	6.0	10.0	5	12.0	16.0	7	18.0	22.0

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
8	21.0	25.0	10	27.0	31.0	12	33.0	37.0
9	24.0	28.0	11	30.0	34.0			

RoHS Compliant		SCHMID-M	
APPD. Angel	SCALE	UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.08 (mm) .00 ± 0.25 (mm) .0 ± 0.4 (mm)	PART NAME MICRO-FIT 3.0 MALE HOUSING XXP BLACK INSULATOR ROHS LOW-LEAD
DWG.	UNIT M M	SIZE A 4	PART NO. SM C03 4130 XX S H
DATE 2009/07/02	PAGE 1 OF 1	REV. A	