


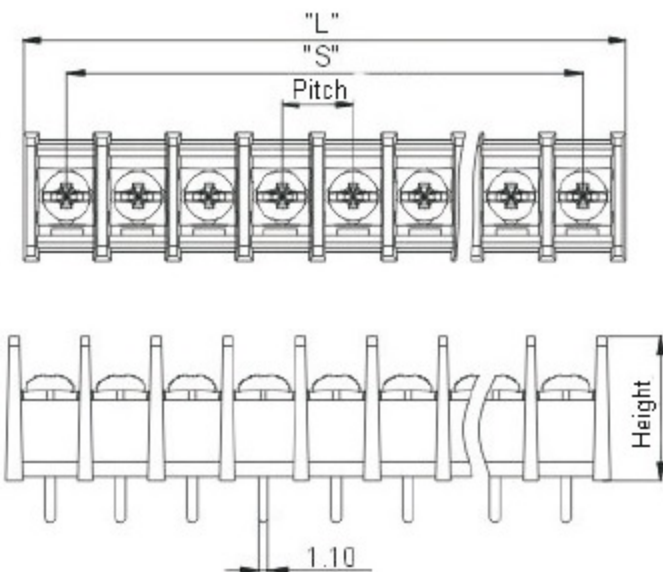


Type: Central Pin



Pitch	9.50mm
Voltage	300V
Current	25A
Wire Range	22-12AWG/4.0mm <sup>2</sup>
Torque	1.2N.m(10.6Lb.in)
Housing	PA66 UL94V-0
Solder Pins	Brass, 1.0t/0.8t, Tin-Plated
Screws	Steel, M4, Ni-Plated
"L"	9.5*(P-1)+11.5
"S"	9.5*(P-1)
"Width"	16mm
"Height"	17.80mm
"LH"	N/A
"PL"	5.20mm
Solder Pins	1.50*0.80
XX - Contact No	02-24
Y-C - Central Pin	S-Side Pin

Type: Side Pin

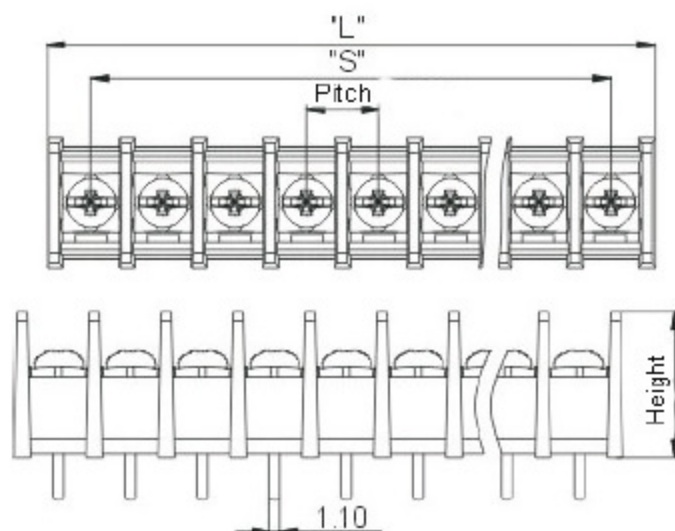

RoHS Compliant		<b>SCHMID-M</b>	
APPD.	SCALE	TOLERANCE X.XX±0.25 X.X±0.35	PART NAME SCHMID-M Barrier Terminal Block RM: 9.50mm
DWG. HELGA	UNIT MM	SIZE A4	PART NO SM C09 79501 XX Y, 25A
DATE 2013/10	PAGE 1 OF 1	REV. C	