


Standard	UL	VDE
Rated voltage	150V	130V
Rated current	6A	8A
Wire range	26-18AWG	1.0mm ²
Withstanding voltage	AC125V/1Min	
Ambient temperature	-40°C~+105°C	
Strip length	4.5mm	
Torque	0.1Nm(0.89Lb-In.)	
Pitch	2.54 mm(.197")	
Poles	2P , 3P ---Any poles	
Housing	PA66,UL94V-0	
Screws	M1.6,steel,Cr ³⁺ Zn plated	
Solder Pins	Brass, Tin plated	
Contact Cage	Brass, Ni plated	

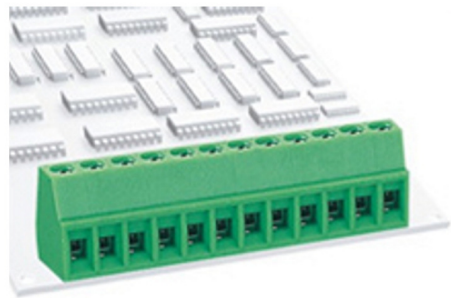

RoHS Compliant		SCHMID-M	
APPD.	SCALE	TOLERANCE	PART NAME
DWG. GRAY	UNIT M M	.0 ± .00 ± ANG. ±	Terminal Block, Screw Clamp Style, hor. cond., Pitch 2,54mm, PCB Straight, XX..... Nr. Pins
DATE 2014/01/30	PAGE 1 OF 1	SIZE A 4	PART NO. SM C09 12419 XX SS4
		REV. A	