


| | | |
|----------------------|---------------------------------------|--------------------|
| Standard | UL | VDE |
| Rated voltage | 300V | 300V |
| Rated current | 15A | 20A |
| Wire range | 24-16AWG | 1.5mm ² |
| Withstanding voltage | AC1250V/1Min | |
| Ambient temperature | -40°C~+105°C | |
| Strip length | 5-6mm | |
| Torque | 0.2Nm(4.4Lb-In.) | |
| Pitch | 3.50 / 3.81 mm(.197") | |
| Poles | 2P , 3P ---Any poles | |
| Housing | PA66,UL94V-0 | |
| Screws | M2.0,steel,Cr ³⁺ Zn plated | |
| Solder Pins | Brass, Tin plated | |
| Contact Cage | Brass, Ni plated | |

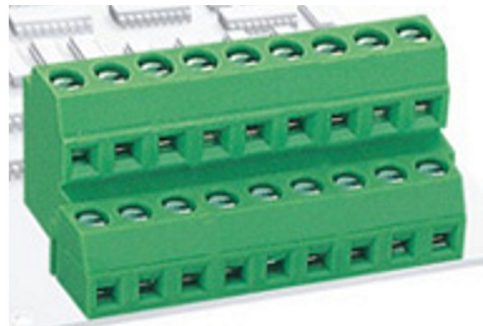

| | | | |
|-----------------|-------------|-----------------|--|
| RoHS Compliant | | SCHMID-M | |
| APPD. | | TOLERANCE | PART NAME |
| DWG. GRAY | SCALE | .0 ± | Terminal Block, Screw Clamp Style, Hor. Cond., |
| DATE 2014/01/30 | UNIT M M | .00 ± | Pitch 3,50mm, PCB Straight, |
| | PAGE 1 OF 1 | ANG. ± | XX..... Nr. Pins |
| | | SIZE. A 4 | PART NO. |
| | | REV. A | SM C09 135381 XX SS4-A |