

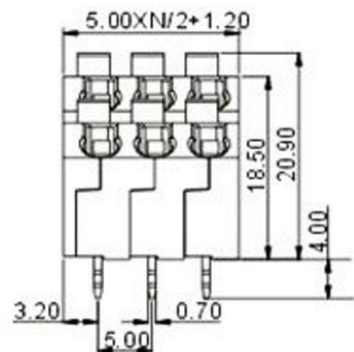
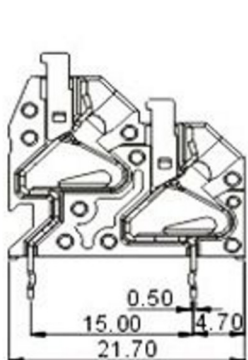


W/O COVER VIEW



Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	12A
Wire range	22-16AWG	0.2-1.5mm ²
Withstanding voltage	AC2000V/1Min	
Ambient temperature	-40°C~+105°C	
Strip length	9--10mm	
Pitch	5.00mm(.100")	
Poles	1P-XXP	
Housing	PA66+5%GF.,UL94V-0	
Pin header	Brass,Tin plated	
Wire guard	Stainless steel	

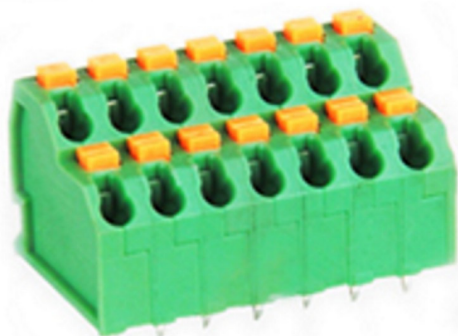

RoHS
Compliant

SCHMID-M

APPD.	 SCALE	TOLERANCE	PART NAME Terminal Block, Spring Style, Pitch 5,00mm, PCB 45°Angle, XX..... Nr. Pins
DWG.		.0 ± .00 ± ANG. ±	
DATE	UNIT	SIZE.	PART NO. SM C09 3509 XX VC4-D
2014/01/27	M M	A 4	
	PAGE	REV.	
	1 OF 1	A	