


Standard	UL	VDE
Rated voltage	300V	250V
Rated current	8A	7A
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	3.80mm(.150")	
Poles	2P, 3P --- Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

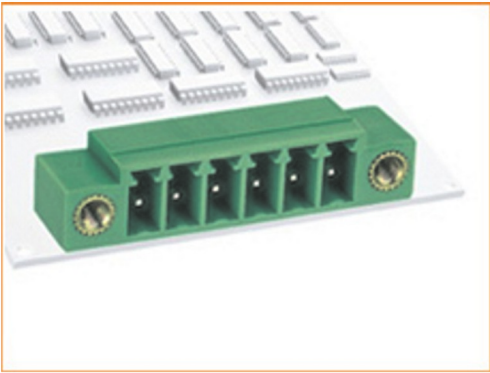

RoHS Compliant		<b>SCHMID-M</b>	
APPD.	SCAIF	TOLERANCE $XX \pm 0.25$ $XX \pm 0.35$ ANG. $\pm$	PART NAME Pluggable Terminal Block PCB Angled Right With Fix Screws Pitch 3,80mm Green XX: No. Poles
DWG. HELGA	UNIT M M	SIZE. A 4	PART NO. SM C09 0382 XX RSC
DATE 2013/10	PAGE 1 OF 1	REV. C	