


Standard	UL	VDE
Rated voltage	300V	250V
Rated current	8A	7A
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	3.50mm(.150")	
Poles	2P, 3P --- Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

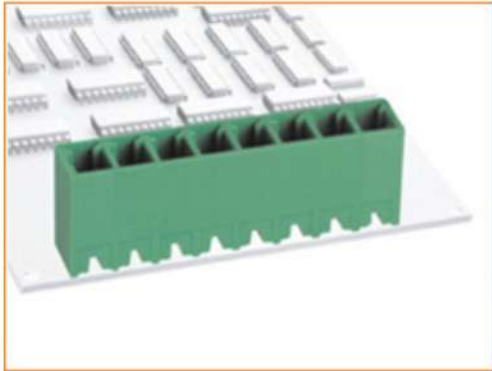

RoHS Compliant **SCHMID-M**

APPD.		TOLERANCE	<b>XX ± 0.25</b> <b>XX ± 0.35</b> ANG. ±	<b>PART NAME</b> Pluggable Terminal Block PCB Straight Without Fix Screws Pitch 3,50mm Green XX: No. Poles
DWG. HELGA		UNIT		
DATE 2013/10	PAGE 1 OF 1	M M	A 4	<b>PART NO.</b> SM C09 0353 XX SOC
			C	