


Standard	UL	VDE
Rated voltage	300v	250V
Rated current	8A	7A
Wire range	28-16AWG	0.5-1.5mm ²
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	

Pitch	3.50/3.81 mm (.150")
Poles	2P, 3P --- Any Poles
Housing	PA66, UL94V-0
Solder Pins	Brass, Tin plated

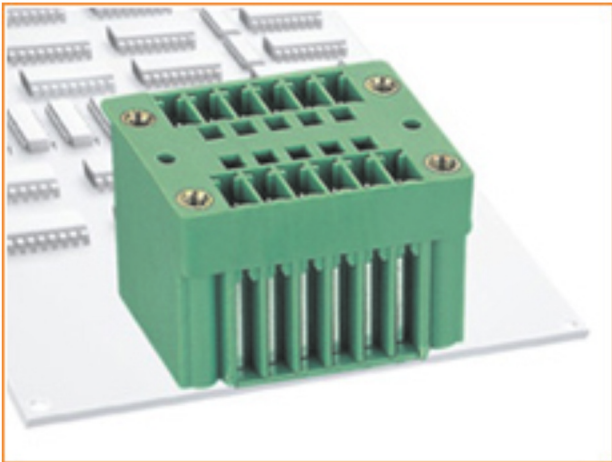

RoHS
Compliant

SCHMID-M

APPD.	SCAF
DWG. HELGA	UNIT M M
DATE 2013/10	PAGE 1 OF 1

TOLERANCE	SIZE. A 4
XX ± 0.25	REV. C
XX ± 0.35	
ANG. ±	

PART NAME	Pluggable Terminal Block PCB Straight With Fix Screws Pitch 3,50mm Green XX: No. Poles
PART NO.	