


Standard	UL	VDE
Rated voltage	300v	250V
Rated current	8A	7A

Withstanding voltage	AC2000V/1Min
Ambient temperature	(-)40°C to +105°C

Pitch	3.50/3.81 mm (.150")
Poles	2P, 3P --- Any Poles
Housing	PA66, UL94V-0
Solder Pins	Brass, Tin plated

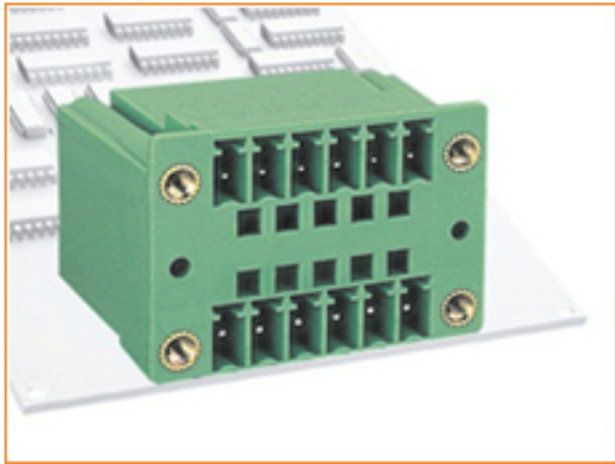

RoHS Compliant		<b>SCHMID-M</b>	
APPD.	SCAL F	TOLERANCE <b>XX ± 0.25</b> <b>XX ± 0.35</b> ANG. ±	PART NAME Pluggable Terminal Block PCB Right Angle With Fix Screws Pitch 3,80mm Green XX: No. Poles
DWG. HELGA	UNIT M M	SIZE. A 4	PART NO. SM C09 0388 XX RSC
DATE 2013/10	PAGE 1 OF 1	REV. C	