


Standard	UL	VDE
Rated voltage	300v	250V
Rated current	8A	7A

Withstanding voltage	AC2000V/1Min
Ambient temperature	(-)40°C to +105°C

Pitch	3.50/3.81 mm (.150")
Poles	2P, 3P --- Any Poles
Housing	PA66, UL94V-0
Solder Pins	Brass, Tin plated

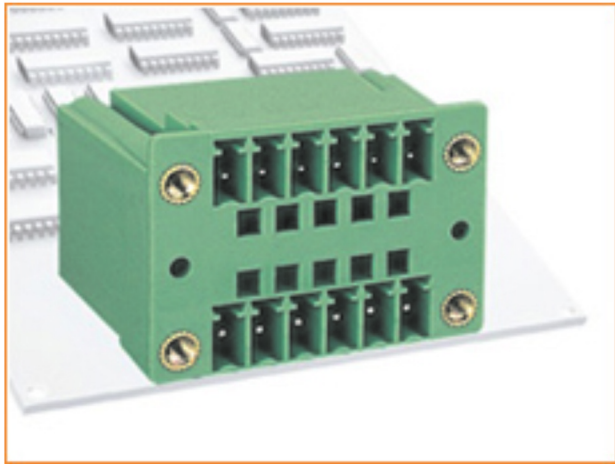

RoHS Compliant SCHMID-M		PART NAME Pluggable Terminal Block PCB Right Angle With Fix Screws Pitch 3,50mm Green XX: No. Poles	
APPD. DWG. HELGA DATE 2013/10	 UNIT M M PAGE 1 OF 1	TOLERANCE XX ± 0.25 XX ± 0.35 ANG. ± SIZE. A 4 REV. C	PART NO. SM C09 0358 XX RSC