


Standard	UL	VDE
Rated Voltage	300V	320V
Rated Current	15A	20A
Withstanding Voltage	AC2500V/1Min	
Ambient Temperature	(-)40°C to +105°C	
Pitch	5.00 (.197")	
Poles	2P, 3P --Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Ni plated	

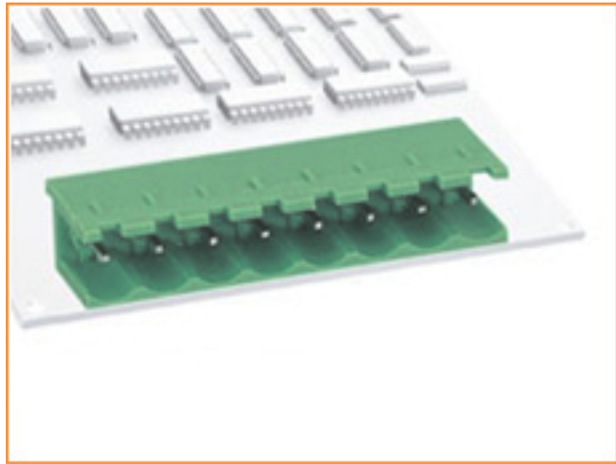

RoHS Compliant		<b>SCHMID-M</b>	
APPD.	SCAL F	TOLERANCE	PART NAME
DWG. HELGA	UNIT M M	XX ± 0.25 XX ± 0.35 ANG. ±	Pluggable Terminal Block PCB Right Angle Side Open Frame With Fix Screws Green XX: No. Poles
DATE 2013/10	PAGE 1 OF 1	SIZE A 4 REV. C	PART NO. SM C09 0502 XX RNC