


| | | |
|----------------------|--------------------|------|
| Standard | UL | VDE |
| Rated Voltage | 300V | 320V |
| Rated Current | 15A | 20A |
| Withstanding Voltage | AC2500V/1Min | |
| Ambient Temperature | (-)40°C to +105°C | |
| Pitch | 5.08 (.197") | |
| Poles | 2P, 3P --Any poles | |
| Housing | PA66, UL94V-0 | |
| Solder Pins | Brass, Ni plated | |

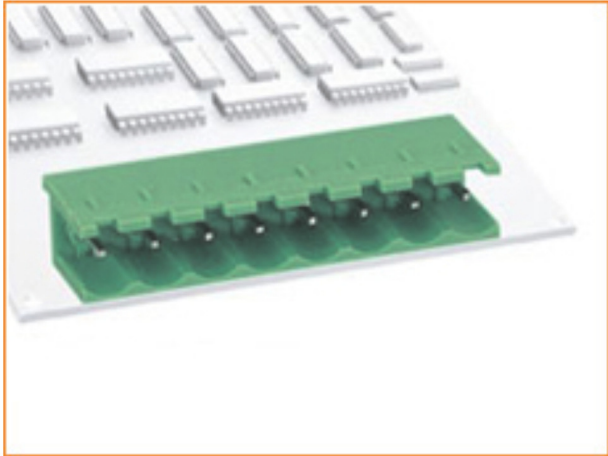

RoHS
Compliant

SCHMID-M

| | | | |
|-----------------|----------------|---|--|
| APPD. | SCAI F | TOLERANCE XX ± 0.25 XX ± 0.35 ANG. ± | PART NAME |
| DWG. HELGA | UNIT M M | SIZE A 4 | Pluggable Terminal Block PCB Right Angle Side Open Frame With Fix Screws Green XX: No. Poles |
| DATE 2013/10 | PAGE 1 OF 1 | REV. C | PART NO. SM C09 0582 XX RNC |