


Standard	UL	VDE
Rated voltage	300V	320V
Rated current	15A	20A
Wire range	28-12AWG	2.5mm ²
Withstanding voltage	AC2500V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	5.00mm(.197")	
Poles	2P, 3P ---Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

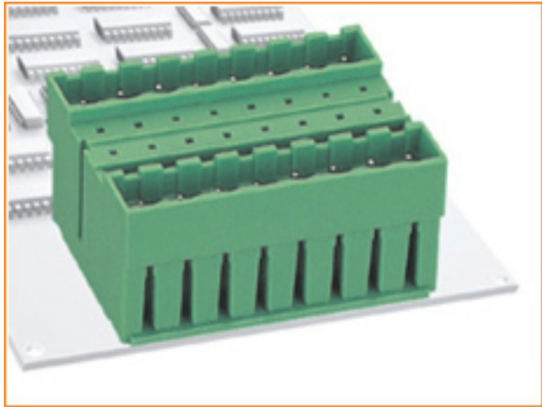

RoHS Compliant			
APPD. DWG. HELGA DATE 2013/10	 TOLERANCE $XX \pm 0.25$ $XX \pm 0.35$ ANG. \pm UNIT M M PAGE 1 OF 1	PART NAME Pluggable Terminal Block PCB Straight Without Fix Screws Pitch 5,00 mm Green XX: No. Poles	PART NO. SM C09 0508 XX SOC