


Standard	UL	VDE
Rated voltage	300V	320V
Rated current	15A	20A
Withstanding voltage	AC2500V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	5.00mm (.197")	
Poles	2P, 3P ---Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

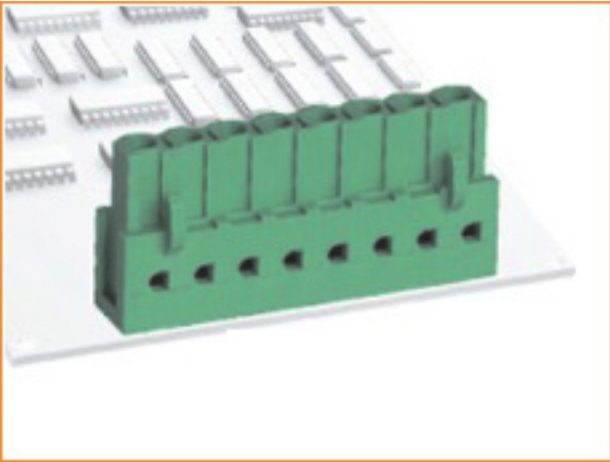

RoHS Compliant		<b>SCHMID-M</b>	
APPD.		TOLERANCE	PART NAME
DWG.	HELGA	XX ± 0.25 XX ± 0.35 ANG. ±	Pluggable Terminal Block PCB Straight Without Fix Screws Pitch 5,00 mm Green XX: No. Poles
DATE	2013/10	UNIT M M	PART NO.
		PAGE 1 OF 1	SM C09 0509 XX SOC
		SIZE A 4	
		REV. C	