


Standard	UL	VDE
Rated voltage	300V	320V
Rated current	15A	20A
Withstanding voltage	AC2500V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	5.00mm (.197")	
Poles	2P, 3P ---Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

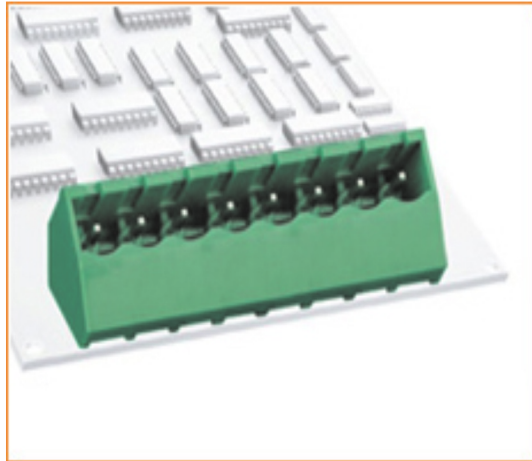

RoHS
Compliant

SCHMID-M

APPD.
DWG. HELGA
DATE 2013/10

SCAI F
UNIT M M
PAGE 1 OF 1

TOLERANCE
XX ± 0.25
YY ± 0.35
ANG. ±
SIZE. A 4
REV. C

PART NAME
Pluggable Terminal Block PCB 45° Angle
Without Fix Screws Pitch 5,00 mm Green XX:
No. Poles
PART NO. SM C09 05010 XX VOC