


Standard	UL	VDE
Rated Voltage	300V	320V
Rated Current	15A	20A
Wire Range	28-12AWG	2.5mm <sup>2</sup>
Withstanding Voltage	AC2500V/1Min	
Ambient Temperature	(-)40°C to +105°C	
Strip Length	7mm	
Pitch	5.08 (.197")	
Poles	2P, 3P --Any poles	
Housing	PA66, UL94V-0	
Wire Cage	Brass, Ni plated	
Contact	Brass, Ni plated	

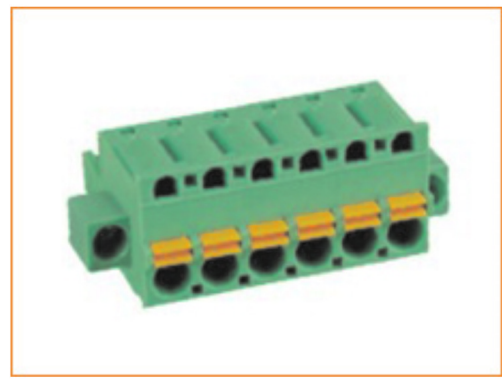

APPD. DWG. HELGA DATE 2013/10		TOLERANCE SCAI F UNIT M M PAGE 1 OF 1	TOLERANCE <b>XX ± 0.25</b> <b>XX ± 0.35</b> ANG. ± SIZE. A 4 REV. C	PART NAME Pluggable Terminal Block Spring Style With Fix Screws Green XX: No. Poles PART NO. SM C09 0581 XX CSC
-------------------------------------	--	--	--	--

RoHS Compliant

**SCHMID-M**