


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.21	



Recommended P.C.Board

Hole Layout

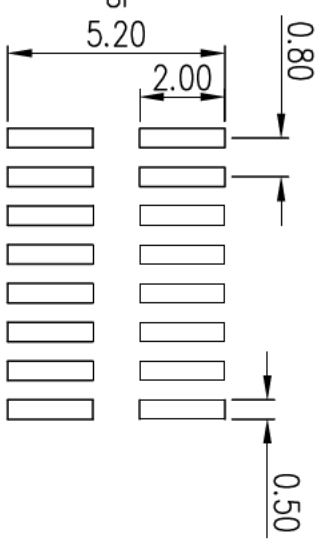

Specifications
 Current Rating: 1Amp
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials

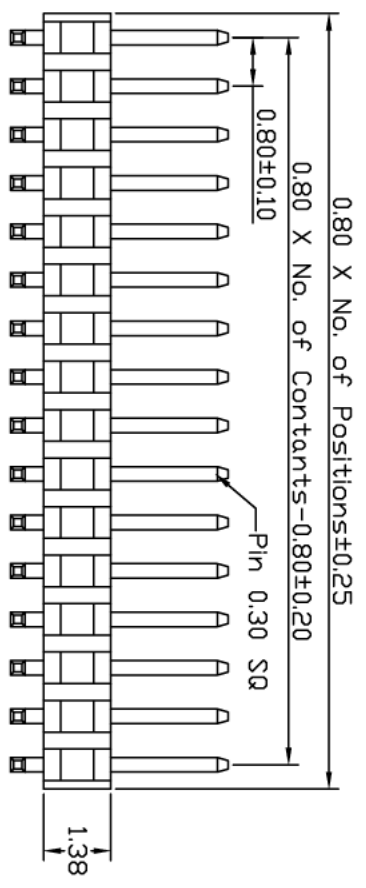

GENERAL TOLERANCE

X. ^o ± 5 ^o	X.	± 0.30
X. ^o ± 2 ^o	X	± 0.20
.XX ^o ± 1 ^o	.XX	± 0.15
.XXX ^o ± 0.5 ^o	.XXX	± 0.10

DESIGN:

CHECKED:	DATE:	2007.11.21
AUDITED:	DATE:	
APPROVED:	DATE:	



PART NO.
SM C02 1208 XX

TITLE:

0.80 PIN HEADER
 DUAL ROWS SMT TYPE
 BASE 1.38H

REV.	UNIT.	SCALE.	PAGE.
01	mm	3:1	1/1



1 2 3 4 5 6 7 8 9