

REV.	LOOKS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE		

Specifications




Current Rating: 0.5Amp
 Insulation Resistance: 500M Min. Ω
 Dielectric Withstanding: 200VAC
 Contact Resistance: 40m MaxΩ
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0

PA6T

All Material must be G.P Material

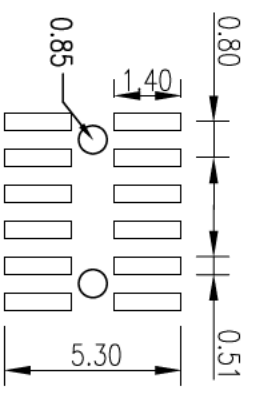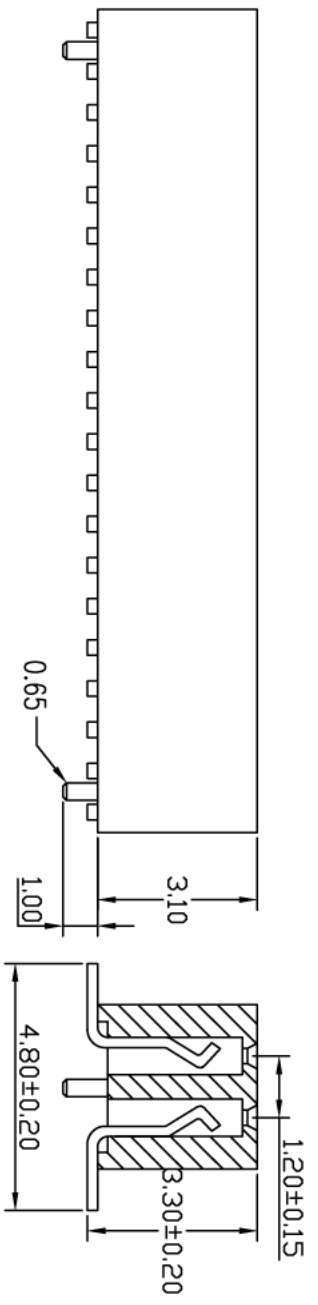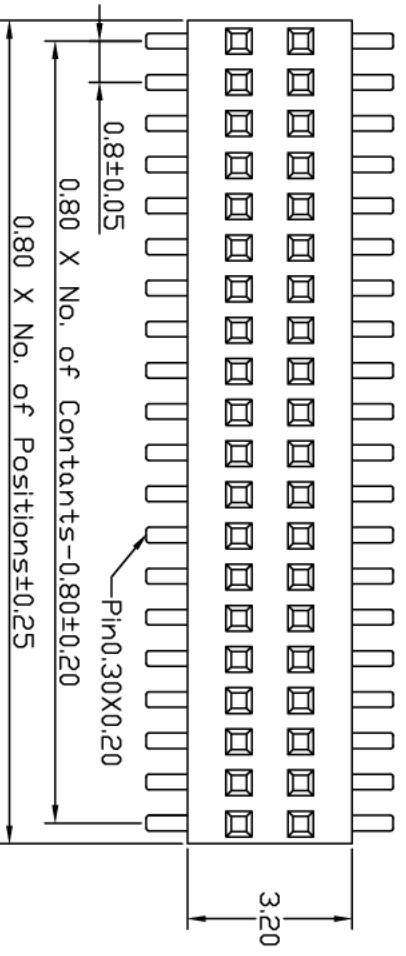

RECOMMENDED P.C. BOARD LAYOUT

XX - number of pins

GENERAL TOLERANCE				DESIGN:		TITLE:	
X. ± 5°	X. ± 0.30	CHECKED:	DATE:			0.80 FEMALE HEADER DUAL ROWS SMT TYPE BASE 3.10H	
X. ± 2°	X. ± 0.20	AUDITED:	DATE:				
.XX ± 1°	.XX ± 0.15	APPROVED:	DATE:				
.XXX ± 0.5°	.XXX ± 0.10			PART NO.	SM C02 5910 XX BD W/LOC PEG		
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1				

A

B

C

D

E

F

1 2 3 4 5 6 7 8 9