

1

2

3

4

5



6

7

8

9

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.04.17	

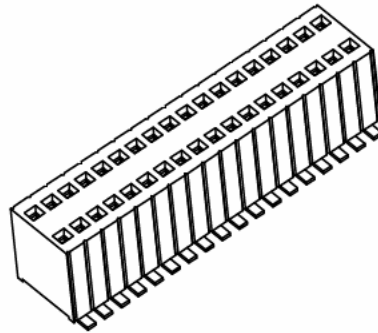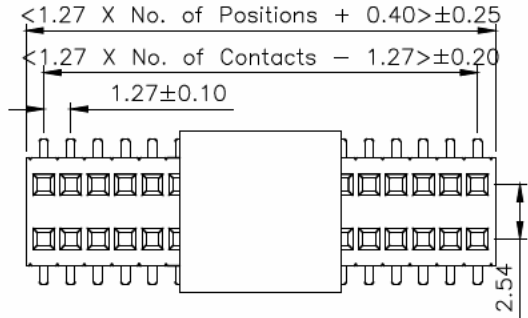

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.




Operating Temperature:

Tin plating: -40°C to +105°C
 Gold plating: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

**Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)**

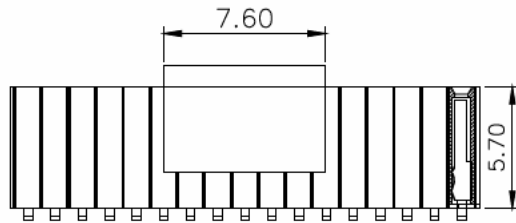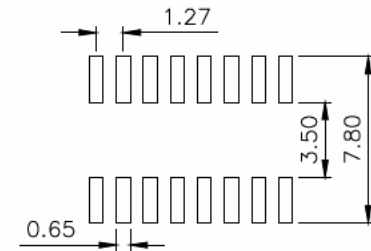

SCHMID-M

GENERAL TOLERANCE

X.* ± 5°	X. ± 0.30
.X* ± 2°	.X ± 0.20
.XX* ± 1°	.XX ± 0.15
.XXX* ± 0.5°	.XXX ± 0.10

DESIGN:

DATE: 2013.04.17

DWG. NO.

TITLE:

CHECKED:

DATE:

PART NO. SM C02 4830 XX
 SMD PAD+TUBE

HEADER BOX FEMALE
 SMD 1,27x2,54
 XX: NR. PINS TOTAL

AUDITED:

DATE:

APPROVED:

DATE:

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	

1

2

3

4

5

6

7

8

9