



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.05.03	



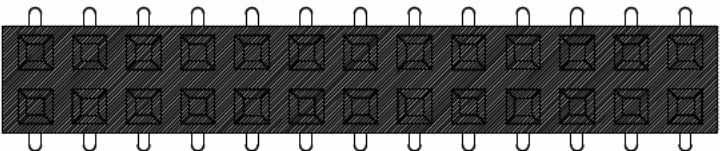


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

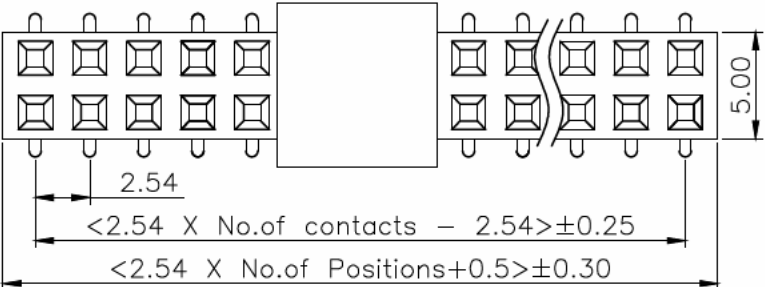

Materials
 Contact Material: Phosphor Bronze.
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be ROHS materials

Recommended P.C.Board

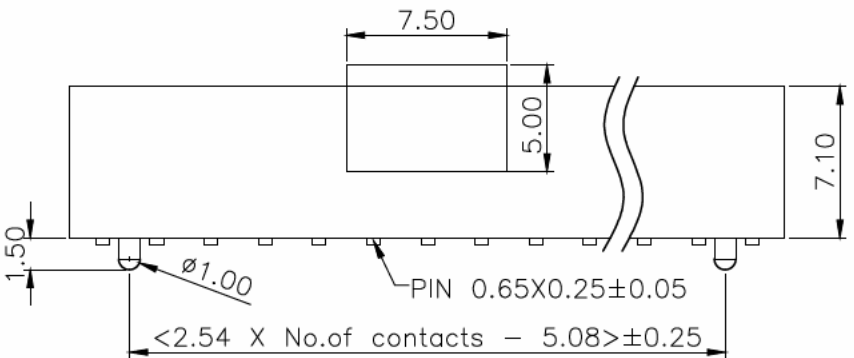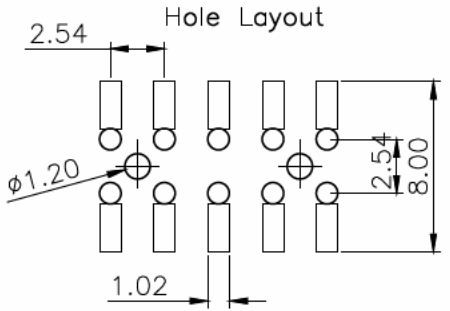

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.
PART NO.
SM C02 2818 XX BDH-GY-P

TITLE.
Female Header SMD RM 2,54x2,54 With Post
Packing: Cap + Tape&Reel
XX: Nr. Poles
Y: Gold Plating: GF-0,8u / G2:5u / G3:10u

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	