



HSF



RoHS

SPECIFICATION

Current Rating: 3Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: UL 94V-0 Black

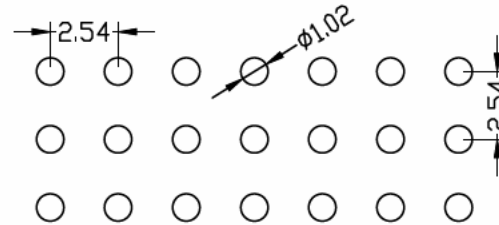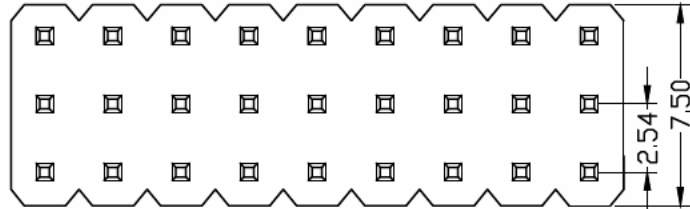



PCB LAYOUT

No. of Contacts: XX:03 To 120


Contact Plating: G0:Gold flash

Insulator Material
 PA6T
 Available Packing:
 B:Bag
 T:Tube

Connector Type
 T:Three
 Pin Length:
 A:0600=6.00mm
 B:0300=3.00mm
 if desired , please mark the desired length in the A/B

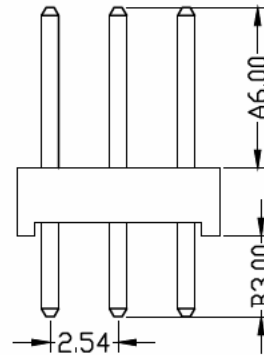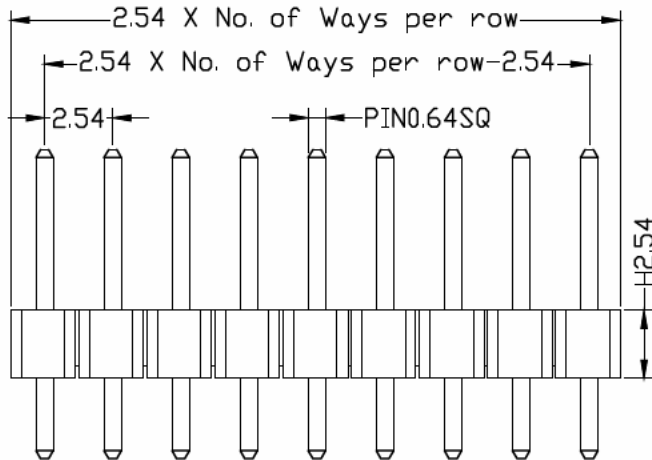

Standard IE P/N :		SM C02 1896 XX CS	
A	B	Unless Otherwise specified tolerance	
6.0	3.0	X. ±0.35	X. XX: ±0.20
		X. X: ±0.25	X. XXX: ±0.15
Optional		SCALE:	UNIT:
		As Shown	mm
DRAW	YG ZHONG	DATE	01/05/2016
CHECK	BobYang	DATE	01/05/2016
TITLE:		2.54mm Pin Header Three Row Straight Type	
DRAWING NO:			
PRODUCT NO:		SM C02 1896 XX CS	



REV	DESCRIPTION	DATE
1	Increase packing method and material	2016/10/25