


Standard	UL	VDE
Rated Voltage	300V	300V
Rated Current	15A	15A
Wire Range	22-14AWG	0.5-4.0mm ²
Withstanding Voltage	AC2500V/1Min	
Torque	0.5Nm(4.5Lb-In.)	
Ambient Temperature	(-)40°C to +110°C	
Strip Length	6-7mm	
Pitch	10.000mm (.374")	
Poles	1P ---10P	
Fuse Type	Ø5 * 20mm	
Housing	PA66, UL94V-0	
Screws	M3.0, steel, Cr ³⁺ + Zn plated	
Cage	Brass, Ni plated	
Contact	Brass, Tin plated	
Wire Guard	Stainless steel	

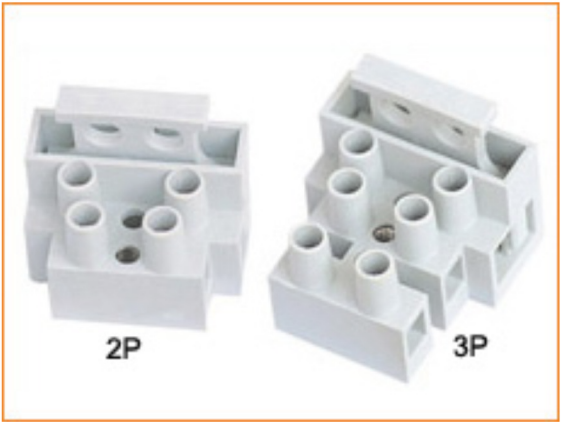

RoHS
Compliant

SCHMID-M

APPD.
DWG. **BRAUN**
DATE 2013/05/14

SCALE
UNIT M M
PAGE 1 OF 1

TOLERANCE
0 ±
.00 ±
ANG. ±
SIZE A 4
REV. A

PART NAME
Fuse Terminal Block
PART NO. SM C09 71001 03 1