

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C

D


E

F

G


H

SM C09 UDK-2.5-TW

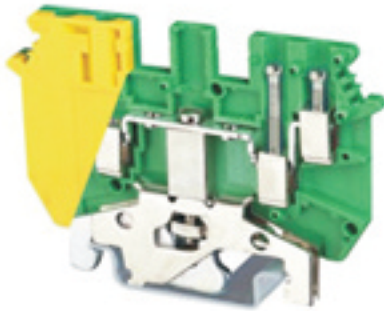

Part Number		SM C09 UDK-2.5-TW	SM C09 UDK-4-TW
Width/Thickness/Height (mm)		63.5/5.2/47	63.5/6.2/47
Screw (mm)		M3	M3
Torque (Nm)		0.6 - 0.8	0.6 - 0.8
Strip Length (mm)		8	8
Wire Size (mm ²)		0.2 - 2.5	0.2 - 4.0
Voltage (V)		300V	300V
Current (A)		20A	30A
Insulating Materials		PA, UL94V-0	PA, UL94V-0
Fixed Bridge	2P	FBRI 2-5N	FBRI 2-6
	3P	FBRI 3-5N	FBRI 3-6
	4P	FBRI 4-5N	BRI 4-6
	10P	FBRI 10-5N	FBRI 10-6
Zack Strip		ZB5	ZB6

SM C09 UDK-4TW

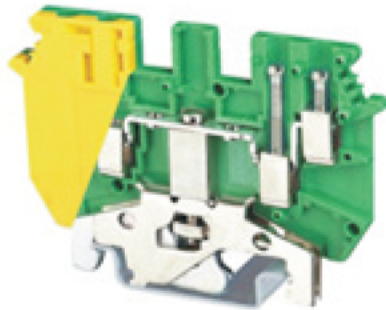

RoHS Compliant		SCHMID-M	
APPD.	 SCALE	TOLERANCE	PART NAME
DWG.		X.XX± 0.25 X.X±0.35 ANG. ±	SM C09 UDK-PE Series
DATE	UNIT	SIZE	PART NO.
2013/10	MM	A4	
	PAGE	REV	
	1 OF 1	C	

1

2

3

4

5

6

7

8