





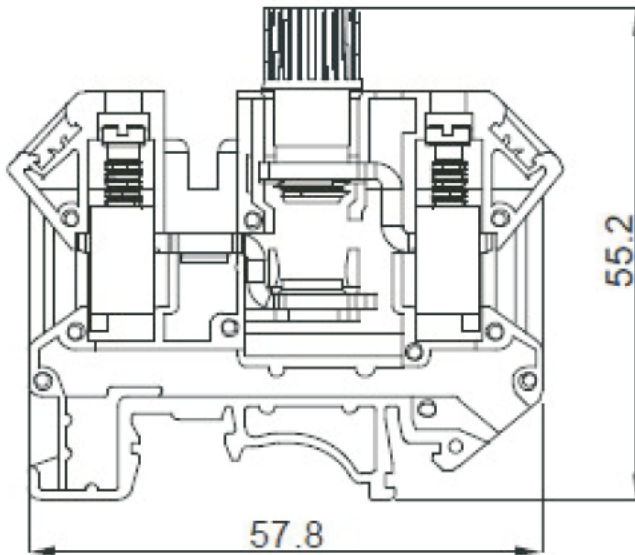






Standard	UL	IEC
Rated voltage	600V	800V
Rated current	10A	10A
Wire size	20-6AWG	0.5-16mm <sup>2</sup>
T/W/End plate	12/62/-mm	
Height (NS35:7.5/NS35:15/NS32)	59/66.5/64mm	
Rated surge voltage/Contamination class	4KV/3	
Stripping length	11mm	
Screw thread/Tightening torque	M4/1.2N.m/10.5Lb-in	
Internal cylindrical gage	B6	
Insulating material/Inflammability class	PAV-0	
Specification	Model	Pieces
Fixed bridge 	FBI 10-12	10
Insertion bridge 	EB 10-12	10
Test plug socket 	DSB 4/7/6	100
Test plug socket, insulated 	DSBJ 4/15/6	
Zack strip 	ZB8	



RoHS Compliant		<b>SCHMID-M</b>	
APPD.		TOLERANCE	PART NAME
DWG.	SCALE	X.XX± 0.25 X.X±0.35 ANG. ±	SM C09 UK10-DR Series
DATE	UNIT	SIZE	
2013/10	MM	A4	PART NO.
	PAGE 1 OF 1	REV C	