

General






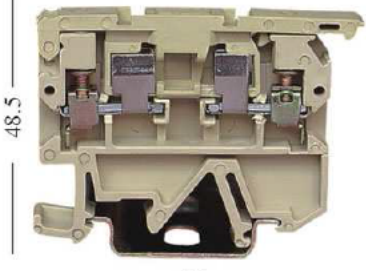

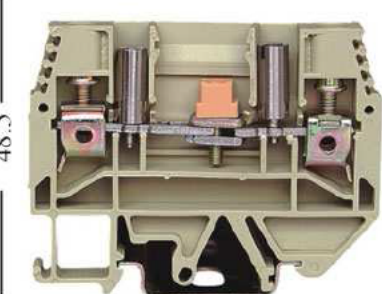
SM C09 SAK series combined terminal blocks mainly use Germany Woodmeler's connection technology, and designed and made at home. Technology targets conforms to the standard or IEC 60947-1, IEC 60947-7-1, GB14048.1. However, JXB is only for mounting on, increase the high current terminal series.

Characteristics

- 1) Reasonable installing design, strong versatility, SM C09 SAK type can be mounted on the guide of Grand TH type.
- 2) small volume, full specification, SM C09 series SAK's big current terminal use reinforced accessories to install steel pressing-wire frame and wire diversion board technology in order to guaranjtee the contact reliable.
- 3) the stand uses creamed-yellow and grey color, the connecting-ground pedestal uses yellow and green color with moore modern sense.

Specific Item Details

<p style="text-align: center;">41 universal type thickness:6</p>	<p style="text-align: center;">42 universal type thickness:8</p>	<p style="text-align: center;">42 universal type thickness:8</p>
<p>Part Number : SM C09 SAK2.5EN</p>	<p>Part Number : SM C09 SAK4EN</p>	<p>Part Number : SM C09 SAK6EN</p>
<p>Voltage / Current : 800V / 24A</p>	<p>Voltage / Current : 800V / 32A</p>	<p>Voltage / Current : 800V / 41A</p>
<p>Wire Size : 0.2—2.5mm²</p>	<p>Wire Size : 0.2—4.0mm²</p>	<p>Wire Size : 0.2—6.0mm²</p>

 <p>52 42 universal type thickness:10</p>	 <p>52 42 universal type thickness:12</p>	 <p>52 42 universal type thickness:14.5</p>
Part Number : SM C09 SAK10EN	Part Number : SM C09 SAK16EN	Part Number : SM C09 SAK25EN
Voltage / Current : 800V / 57A	Voltage / Current : 800V / 76A	Voltage / Current : 800V / 100A
Wire Size : 0.2—10mm²	Wire Size : 0.5—16mm²	Wire Size : 0.5—16mm²
 <p>57.5 50 universal type thickness:18</p>	 <p>87 75 universal type thickness:22</p>	 <p>48.5 58 fuse type thickness:6</p>
Part Number : SM C09 SAK35EN	Part Number : SM C09 SAK70EN	Part Number : SM C09 AK-RD-4EN
Voltage / Current : 800V / 125A	Voltage / Current : 800V / 192A	Voltage / Current : 500V / 6.3A
Wire Size : 10—35mm²	Wire Size : 25—70mm²	Wire Size : 0.2-4.0mm²
 <p>60.5 54 double level type thickness:6</p>	 <p>48.5 65 test type thickness:8</p>	
Part Number : SM C09 SAK-4Q	Part Number : SM C09 SAK-WTK-4EN	
Voltage / Current : 500V / 32A	Voltage / Current : 400V / 41A	
Wire Size : 0.2—4.0mm²	Wire Size : 0.2—4.0mm²	