


RS Pro M12 male-M12 Female Angled

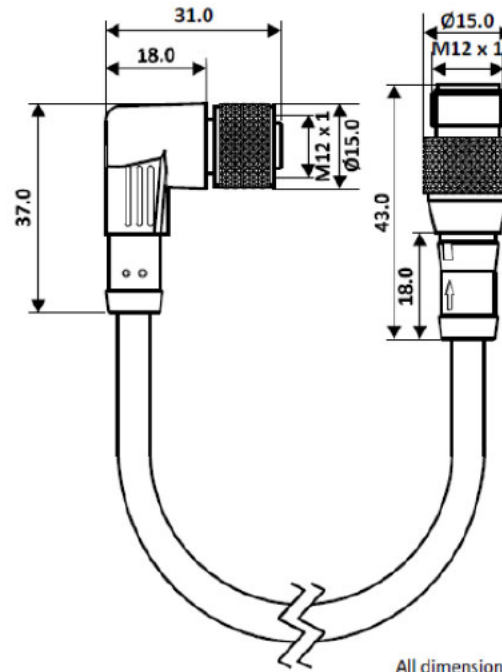

All dimensions are in mm.

General Specification

Rated Operational Voltage	250V
Current Rating	4A
Insulation Resistance	>=100MΩ
Temperature Range	-25°C ... +75°C
Degree Of Protection	IP67

Material Specification



Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Plated
Contact Carrier	Nylon 66
O-Ring	Neoprene
Grip Colour	Black
Coupling Nut	Brass Nickel-Plated

Cable Specification

Cable Length-L	2m
Cable Type	3 Core PVC Multi Strand
Sheath Colour	Black
Cross Section of Wire	0.34sq. mm
Core Dia	As per Manufacturer Specs.
Cable Dia	As per Manufacturer Specs.

Pin Assignment



TOLERANCE		
SCALE	UNIT	
DRAW Brown	DATE 1.11.2018	
CHECK Walter	REV	TITLE SM C10 DF12R4-M12S3-02BP34
		DESCRIPTION RS Pro M12 male-M12 Female Angled