


# Connector Assembly



## Dimensions: (mm)



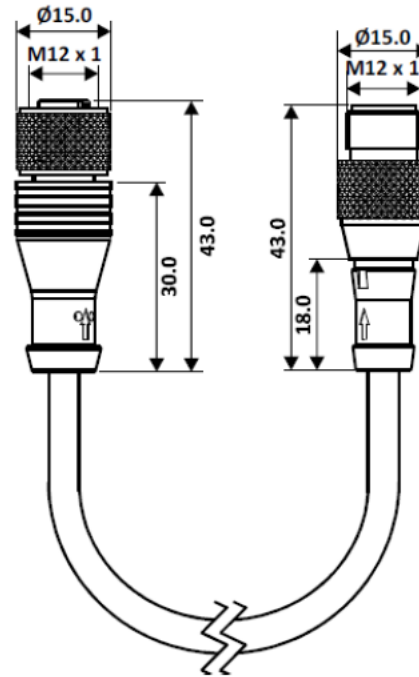

## Specifications

General Specification	
Rated Operational Voltage	250 V
Current Rating	4A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C ... +75°C
Degree of Protection	IP67

Material Specification	
Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Plated
Contact Carrier	Nylon 66
O-Ring	Neoprene
Grip Colour	Black
Coupling Nut	Brass Nickel-Plated

Cable Specification	
Cable Length-L	2 m
Cable Type	4 Core PVC Multi Strand
Sheath Colour	Black
Cross Section of Wire	0.34 sq. mm
Core Dia	1.3 mm
Cable Dia	4.9 ± 0.1 mm
Termination	Partially Stripped

TOLERANCE				
SCALE	UNIT			
DRAW	Brown	DATE	30.10.2018	<b>TITLE</b> <b>SM C10 DF12S4-M12S4-02BP34</b>
CHECK	Walter	REV		
		<b>DESCRIPTION</b> Connector Assembly		