


# M08 Female Right Angled

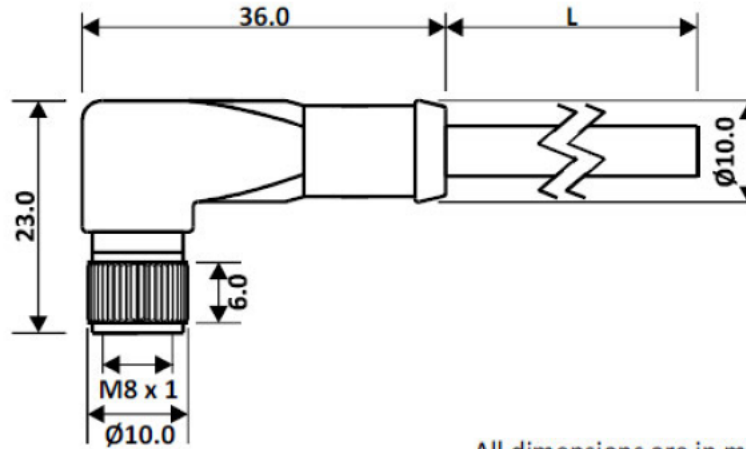

All dimensions are in mm.



## General Specification

Rated Operational Voltage	30 V
Current Rating	4A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C ... +75°C
Degree of Protection	IP67

## Material Specification

Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Plated
Contact Carrier	Nylon 66
Grip Colour	Transparent/Orange
Coupling Nut	Brass Nickel-Plated

## Pin Assignment

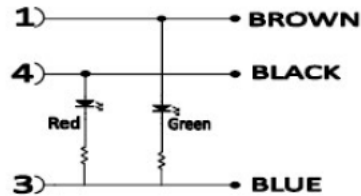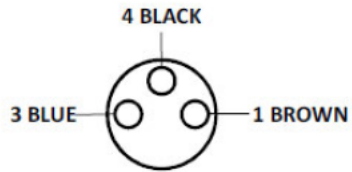

## Cable Specification

Cable Length-L	2 m
Cable Type	3 Core PUR Multi Strand
Sheath Colour	Black
Cross Section of Wire	0.34 sq. mm
Core Dia	1.4 mm
Cable Dia	4.5 ± 0.1 mm
Termination	Partially Stripped
LED Indication	Power - Green
	Output - Red
Output Type	PNP

TOLERANCE				
SCALE	UNIT			
DRAW	Brown	DATE	5.11.2018	<b>TITLE</b> SM C10 BF08-R33N2-02BPUR
CHECK	Walter	REV		
		<b>DESCRIPTION</b> M08 Female Right Angled		