



SM C10 PM12-FPBR12-S0

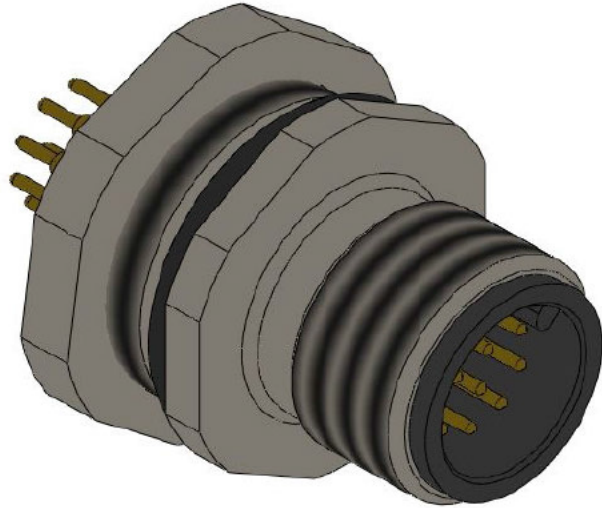

Pin Assignment




General Specification

Rated Operational Voltage	30 V
Current Rating	1.5A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C ... +75°C
Degree of Protection	IP67

Material Specification

Housing Material	Brass Ni Plated
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66
O-Ring	Neoprene
Pole	12
Clamp Nut	PG9

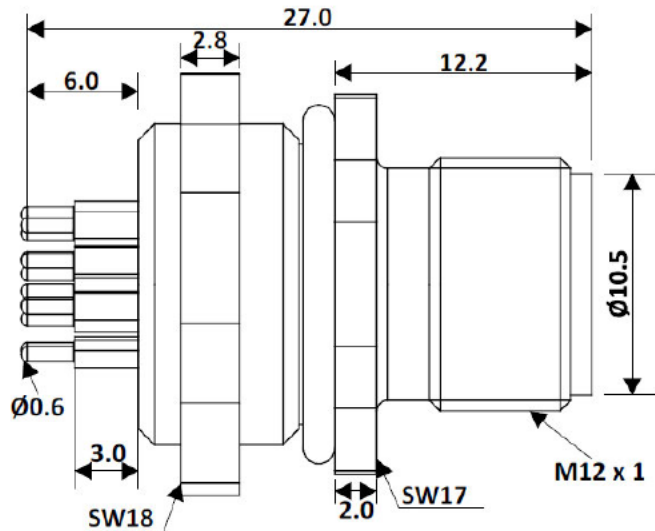

All dimensions are in mm.

TOLERANCE				
SCALE	UNIT			
DRAW	Braun	DATE	28.11.2018	TITLE SM C10 PM12-FPBR12-S0
CHECK	Walter	REV		
		DESCRIPTION M12 Male Frount Panel Mount		